



# V-Poster

INDOOR FINE PIXEL PITCH ADVERTISING DISPLAY

— THE LEADER AND CREATOR OF FLIP CHIP DISPLAY PANEL —





## Excellent Display Effect


Stunning contrast with more bright and vivid picture



## Ultra Thin

Only 30mm thickness of display area, movable with wheels

600mm

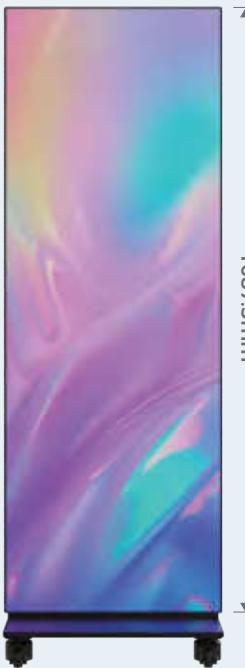

610mm



1806mm

1687.5mm

USB3.0  
USB×2  
Swither  
Antenna  
Network interface  
HDMI×2  
Power


500mm



## ► MULTIPLE INSTALLATIONS



Bracket Standing

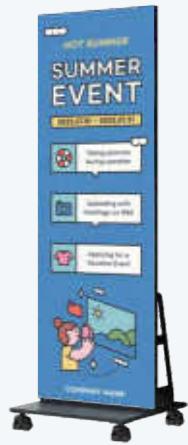

Base Standing



Hanging



Multi-screen Cascade



Wall Mounting

## ► APPLICATIONS

- Exhibitions-Gallery, Booth
- Rental-Stage, Wedding, hotel, Conference, Competition
- Commerce-Catering, 4S stores, Jewelry stores, Cinemas, Shopping malls
- Public-Government, Medical institutions, Education, Bank, Telecom, Public
- Public Transport-Airport, Railway station, Bus station



## User Convenience: Front Maintenance

All component can be replaced from front side  
Convenient and fast.



## Cable Free & Hot Plugging

Integrated hard connection design, support  
hot plug, high stability.




## Easy Connection

Easily control by 5G signal, LAN cable and USB  
Multiple connection options for configuration.



## Cloud Control

Release programs from the cloud, without  
geographical restrictions, anytime, anywhere.

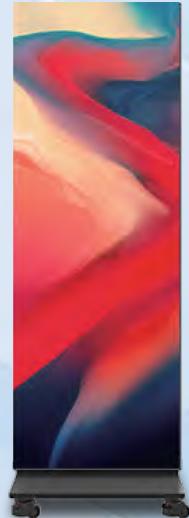

## Foldable Structure





## High Protection

Through the GOB(SMD)or COB package process, module surface will be fully sealed with epoxy resin, which gives a fully protection for product against various external influences.



## Wider View Angle

Flip chip COB makes wider view angle 170°/170°.

Dust-proof

Damp-proof

Abrasion-proof

Anti-collision

Antistatic

Anti-oxidation And Etc



<b>SPECIFICATION</b>	<b>P009</b>	<b>P012</b>	<b>P015</b>	<b>P018</b>
<b>Pixel Pitch (mm)</b>	0.9	1.25	1.56	1.875
<b>Resolution (W×H)</b>	640x1800	480x1350	384x1080	320x900
<b>External Dimension (mm)(W×H×D)</b>	610x1806x500			
<b>Weight (kg)</b>	45			
<b>Brightness (nits)</b>	600			
<b>Color Temperature (K)</b>	2500~10000(adjustable)			
<b>Pixel Configuration</b>	COB			
<b>Refresh Rate (Hz)</b>	3840			
<b>Gray Scale (bit)</b>	14~16			
<b>Working Voltage (V)</b>	AC100~240 (50~60Hz)			
<b>Max. Power Consumption(W)</b>	≤450	≤400	≤400	≤400
<b>Avg. Power Consumption(W)</b>	≤150	≤133	≤133	≤133
<b>Maintenance Mode</b>	Front access			
<b>Operation Temp(°C)</b>	-10~+40			
<b>Operation Humidity (RH)</b>	10%~80%			
<b>Communication Mode</b>	WiFi, RJ45, 4G			
<b>Display Mode</b>	Synchronous/Asynchronous			

The parameter index will change according to the specific situation of the project (the product shall be subjected to the submitted contract specification)

SPECIFICATION	P012	P015	P018	P025
<b>Pixel Pitch (mm)</b>	1.25	1.56	1.875	2.5
<b>Resolution (W×H)</b>	480x1350	384x1080	320x900	240x675
<b>External Dimension (mm)(W×H×D)</b>	610x1806x500			
<b>Weight (kg)</b>	47			
<b>Brightness (nits)</b>	600-800			
<b>Color Temperature (K)</b>	2500~10000(adjustable)			
<b>Pixel Configuration</b>	SMD			
<b>Refresh Rate (Hz)</b>	≤3840			
<b>Gray Scale (bit)</b>	14			
<b>Working Voltage (V)</b>	AC100~240 (50~60Hz)			
<b>Max. Power Consumption(W)</b>	≤550	≤450	≤450	≤450
<b>Avg. Power Consumption(W)</b>	≤180	≤150	≤150	≤150
<b>Maintenance Mode</b>	Front access			
<b>Operation Temp (°C)</b>	-10~+40			
<b>Operation Humidity (RH)</b>	10%~80%			
<b>Communication Mode</b>	WiFi, RJ45, 4G			
<b>Display Mode</b>	Synchronous/Asynchronous			

## SHENZHEN LP DISPLAY TECHNOLOGY CO., LTD

TEL:+86-755-2350 2825 WEB:[www.szlpdisplay.com](http://www.szlpdisplay.com)

ADD: 11th Floor, Building 1, Huidongsheng industrial Park, No. 1028 Guangqiao Avenue, Yulu Community, Yutang Street, Guangming District, Shenzhen, P.R. China